



## IRRORATRICI TRAINATE mod. ARES



**Qualità ed affidabilità, da sempre**

### **CARATTERISTICHE TECNICHE E ALLESTIMENTO DI SERIE**

**CAPACITA' CISTERNA : LITRI 2000-2500-3000**

SERBATOIO LAVACIRCUITO : LITRI 270

SERBATOIO LAVAMANI : LITRI 15

AGITAZIONE SERBATOIO: AGITATORI IDRAULICI E TUBI DI SCARICO

**POMPA** : AR 250-280 -D274

RUOTE STANDARD : 230/95R44

RUOTE IN ALTERNATIVA : 270/95R44-270/95R48-300/95R46

**CARREGGIATA REGOLABILE** DA 1500 mm a 2000 mm

**TIMONI DISPONIBILI** : FISSO CON OCCHIONE REGOLABILE, STERZANTE TRAIL, STERZANTE AI BRACCI DEL SOLLEVATORE

**BARRE DA 15 A 24 MT. A CHIUSURA IDRAULICA LATERALE**

COMANDO DISTRIBUZIONE : **COMPUTER TEEJET 844 5 VIE** (TEEJET 854 - TEEJET RADION - BRAVO 300 S - BRAVO 400 S GPS IN OPZIONE)

**IMPIANTO IDRAULICO** INDIPENDENTE

COMANDI ELETTRIDRAULICO

**MIXER 60 LITRI** CON DISPOSITIVO DI ABBASSAMENTO

PORTAGETTI TRIJET

CONTENITORE PORTAPRODOTTI CON SPORTELLO

LIVELLO A SECCO

SOLLEVAMENTO IDRAULICO CORSA 1200 mm

PESO IN CONFIGURAZIONE STANDARD : 1900 KG

### **OPTIONAL**

SOSPENSIONE A PARALLELOGRAMMA CON AMMORTIZZATORE PNEUMATICO

KIT MANICA ARIA AIR ASSISTED

SOLLEVAMENTO IDRAULICO CORSA 1500 mm

GUIDA GPS

TRACCIAFILE SCHIUMOGENO

OMOLOGAZIONE STRADALE ITALIA (A VUOTO)

GEOMETRIA VARIABILE AMMORTIZZATA

TUBO DI CARICAMENTO CON ARROTOLATORE




**CORIMA SRL - Via G. Rossini 148 - 62011 CINGOLI (MC) Italy - Tel. (+39) 0733-616257 info@corima-srl.it**

**www.corima-srl.it**



## TRAILED SPRAYERS mod. ARES

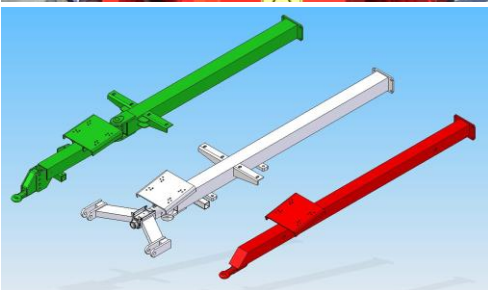

### TECHNICAL FEATURES AND STANDARD EQUIPMENT

**TANK CAPACITY: LT 2000-2500 -3000**

TANK FOR SYSTEM WASHING: 270 LITERS

TANK FOR HANDS WASHING: 15 LITERS

AGITATION TANK: HYDRAULIC AGITATORS AND DRAIN PIPES

**PUMP:** AR 250-280 -D274

STANDARD WHEELS: 230/95R44

ALTERNATIVE WHEELS: 270/95R44-270/95R48-300/95R46

**ADJUSTABLE TRACK :** FROM 1500 MM TO 2000 MM

**AVAILABLE DRAWBARS:** FIXED DRAWBAR WITH ADJUSTABLE HEIGHT,

STEERING TRAIL DRAWBAR, STEERING DRAWBAR TO LIFTING ARMS

**BOOMS FROM 15 TO 24 METERS WITH HYDRAULIC SIDE CLOSING**

DISTRIBUTION CONTROL: **COMPUTER TEEJET 844 5 WAYS**

(TEEJET 854-TEEJET RADION-BRAVO 300 S-BRAVO 400 S GPS OPTIONAL)

**HYDRAULIC INDEPENDENT SYSTEM**

ELECTROHYDRAULIC CONTROLS

**MIXER 60 LITERS WITH LOWERING DEVICE**

**TRIJET SUPPORT-NOZZLE**

BOX WITH DOOR TO TAKE PRODUCTS

DRY LEVEL GAUGE

HYDRAULIC LIFTING STROKE MM 1200

STANDARD SETUP WEIGHT: 1900 KG

### OPTIONAL

PARALLELOGRAM SUSPENSION WITH AIR SHOCK-ABSORBER

KIT AIR SLEEVE ASSISTED

HYDRAULIC LIFTING STROKE MM 1500

GPS CONTROL

FOAM ROW MARKER

VARIABLE GEOMETRY WITH SHOCK-ABSORBER

FILLING PIPE WITH ROLLER UP

